

18-36V Input, 8V/8A Output Sixteenth Brick



Features

- Wide input voltage range: 18 – 36V
- High Efficiency: 91% at 8V/8A output
- Optimal thermal performance
- Remote sense, On/Off control,
- Over-voltage, over-current, short-circuit, and over temperature protection
- Monotonic start-up into pre-biased load
- 1500V isolation voltage

For High Reliability Applications

Options

- Open-frame, Baseplate, or Encapsulated
- Auto-restart or lock-up protection mode
- Negative / Positive enable logic

Part Numbering System

SA	24	X	080	X	008	X	X	X	X
Series Name	Nominal Input Voltage	Temperature Grade (Baseplate Temperature)	Output Voltage	Enabling Logic	Rated Output Current	Pin Length	Electrical Option	Mechanical Options	Lead-free, ROHS Compliant
SA	24: 18-36V	C: -40C--80C H: -40C--100C M: -55C--100C	Unit: 0.1V 080: 8.0V	P: Positive N: Negative	Unit: A 008: 8A	R: 0.180"	0: Lock-up 2: Auto-restart	0: Open-frame 1: Baseplate 2: Encapsulated 3: with mounting holes	G: Lead-free

General Specification

Absolute Maximum Rating

Excessive stresses over these absolute maximum ratings can cause permanent damage to the converter. Also, exposure to absolute maximum ratings for extended periods of time can adversely affect the reliability of the converter. Operation should be limited to the conditions outlined under the Electrical Specification Section.

Parameter	Symbol	Min	Max	Unit
Input Voltage (continuous)	V_i	-0.5	40	Vdc
Transient Input Voltage (<100ms continuous operating)	$V_{i,trans}$	-	50	Vdc
I/O Isolation Voltage (for 1 minute)		-	1500	Vdc
Operating Ambient Temperature	T_o			
“C” Temperature grade		-40	80	°C
“H” Temperature grade		-40	100	°C
“M” Temperature grade		-55	100	°C
Storage Temperature	T_{stg}	-55	125	°C

Electrical Specifications

The specifications are valid over all operating conditions including input voltage, resistive load, and temperature except as noted.

Input Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Input Voltage	V_i	18	24	36	Vdc
Input Current	$I_{i,max}$	-	-	4	A
Quiescent Input Current ($V_{in} = 24V$)	$I_{i,Qsnt}$	-	80	100	mA
Standby Input Current	$I_{i,stdby}$	-	4	6	mA
Inrush Transient	I^2t	-	-	1.0	A ² s
Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 12 μ H source impedance)	-	-	10	-	mA
Input Ripple Rejection (120 Hz)	-	-	60	-	dB
Input Turn-on Voltage Threshold	-	16.5	17	18	V
Input Turn-off Voltage Threshold	-	15.5	16.0	17	V
Input Voltage ON/OFF Hysteresis	-	-	1	-	V

Output Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage Set Point			8		
Output Voltage Set Point Accuracy ($V_i = 24V$; $I_o = I_{o,max}$; $T_a = 25^\circ C$)	-	-2		+2	% V_o
Output Voltage Set Point Accuracy (over all conditions)	-	-3		+3	% V_o
Output Regulation:					
Line Regulation ($V_i = 18V$ to $36V$, $I_o = 1/2$ of load)	-	-	0.2	0.5	% V_o
Load Regulation ($I_o = I_{o,min}$ to $I_{o,max}$, $V_i = 24V$)	-	-	0.2	0.5	% V_o
Temperature ($T_a = -55^\circ C$ to $100^\circ C$)	-	-	0.1		% V_o
Output Ripple and Noise Voltage RMS	-	-		113	mVrms
Peak-to-peak (5 Hz to 20 MHz bandwidth, $V_{in} = 24V$)				225	mVp-p
External Load Capacitance	-	-	-	2200	μF
Output Current	I_o	0	-	8	A
Output Power	P_o	0		64	W

Output Specifications (continued)

Parameter	Symbol	Min	Typ	Max	Unit
Output Current-limit Protection Trip Point ($V_o = 90\%$ of $V_{o,nom}$)	$I_{o,cli}$	8.8	9.6	13.6	A
Efficiency ($V_i = 24V$ $I_o = I_{o,max}$, $T_A = 25^\circ C$)	η	89	91	-	%
Output Over Voltage Protection Trip Point		8.8	9.6	12	V
Switching frequency	-	280	300	320	kHz
Dynamic Response ($V_i = 24V$ $T_a = 25^\circ C$; Load transient $0.1A/\mu s$)					
Load step from 50% to 75% of full load:					
Peak deviation			4		% V_o
Settling time (to 10% band of V_o deviation)			150		μs
Load step from 50% to 25% of full load					
Peak deviation			4		% V_o
Settling time (to 10% band of V_o deviation)			150		μs

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Remote Enable					
Negative Logic:					
Logic Low – Module On	-	-	-	-	-
Logic High – Module Off					
Positive Logic:					
Logic High – Module On	-	-	-	-	-
Logic Low – Module Off					
Logic Low:					
$I_{ON/OFF} = 1.0mA$	$V_{ON/OFF}$	0	-	1.2	V
$V_{ON/OFF} = 0.0V$	$I_{ON/OFF}$	-	-	1.0	mA
Logic High:					
$I_{ON/OFF} = 0.0\mu A$	$V_{ON/OFF}$	-	-	15	V
Leakage Current	$I_{ON/OFF}$	-	-	50	μA
Turn-on Time ($I_o =$ full load, V_o within 1% of setpoint)		-	10	14	ms
Output Voltage Trim Range	-	80	-	110	% V_o
Output Voltage Remote-sense Range	-	-	-	0.5	V
Over-temperature Protection	T_o	-	120	-	$^\circ C$
Isolation Capacitance	-	-	1200	-	pF
Isolation Resistance	-	10	-	-	M Ω
Calculated MTBF (Bellcore TR-332)			3.2		10^6 -hour

Feature Descriptions

The converter can be turned on and off by changing the voltage between the ON/OFF pin and Vin(-). The SA24 Series of converters is available with factory selectable positive logic and negative logic.

For the negative control logic, the converter is ON when the ON/OFF pin is at a logic low level and OFF when the ON/OFF pin is at a logic high level. For the positive control logic, the converter is ON when the ON/OFF pin is at a logic high level and OFF when the ON/OFF pin is at a logic low level.

With the internal pull-up circuitry, a simple external switch between the ON/OFF pin and Vin(-) can control the converter. A few example circuits for controlling the ON/OFF pin are shown in Fig. 1, 2 and 3.

The logic low level is from 0V to 1.2V and the maximum switch current during logic low is 1mA. The external switch must be capable of maintaining a logic-low level while sinking up to this current. The maximum voltage at the ON/OFF pin generated by the converter internal circuitry is less than 15V. The maximum allowable leakage current is 50µA.

Remote SENSE

The remote SENSE pins are used to sense the voltage at the load point to accurately regulate the load voltage and eliminate the impact of the voltage drop in the power distribution path.

SENSE(+) and SENSE(-) pins should be connected to the point where regulation is desired. The voltage between the SENSE pins and the output pins must not exceed 0.5V:

$$[V_{out}(+) - V_{out}(-)] - [SENSE(+) - SENSE(-)] < 0.5V$$

When remote sense is not used, the SENSE pins should be connected to their corresponding output terminals (positive and negative). If the SENSE pins are left floating, the converter will deliver an output voltage slightly higher than its specified typical output voltage. Since the OVP (output over-voltage protection) circuit senses the voltage across the output pins (Pin 8 and Pin 4), the total voltage rise should not exceed the minimum OVP setpoint given in the Specifications table.




Fig. 1 Opto Coupler Enable Circuit

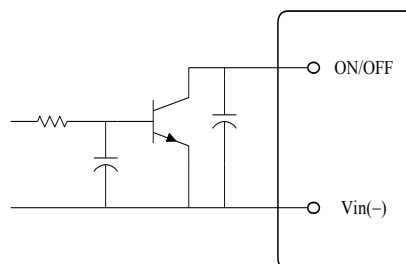


Fig. 2 Open Collector Enable Circuit

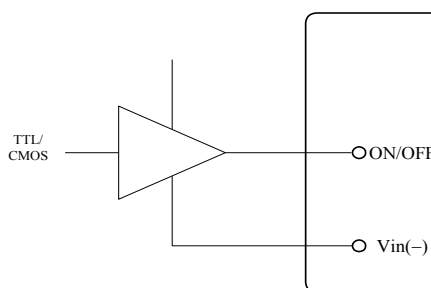


Fig. 3 Direct Logic Drive

Output Voltage Adjustment (Trim)

The trim pin allows the user to adjust the output voltage set point. To increase the output voltage, an external resistor is connected between the TRIM pin and SENSE(+). To decrease the output voltage, an external resistor is connected between the TRIM pin and

SENSE(-). The output voltage trim range is 80% to 110% of its specified nominal output voltage. The circuit configuration for trim down operation is shown in Fig.4.

$$R_{down} = \left(\frac{511}{\Delta} - 10.22 \right) (k\Omega)$$

Where

$$\Delta = \left(\frac{|V_{nom} - V_{adj}|}{V_{nom}} \right) \times 100$$

and V_{nom} = Nominal Voltage
 V_{adj} = Adjusted Voltage

The circuit configuration for trim up operation is shown in Fig.5.

To increase the output voltage, the value of the resistor should be

$$R_{up} = \left(\frac{5.11V_o(100 + \Delta)}{1.225\Delta} - \frac{511}{\Delta} - 10.22 \right) (k\Omega)$$

Where V_o = Nominal Output Voltage

As the output voltage at the converter output terminals are higher than the specified nominal level when using the trim up and/or remote sense functions, it is important not to exceed the maximum power rating of the converter as given in the Specifications table.

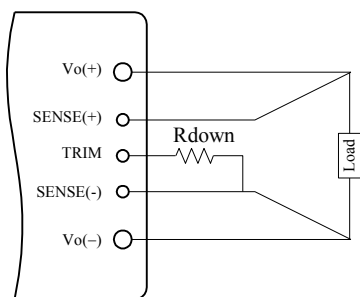


Fig. 4 Circuit to Decrease Output Voltage

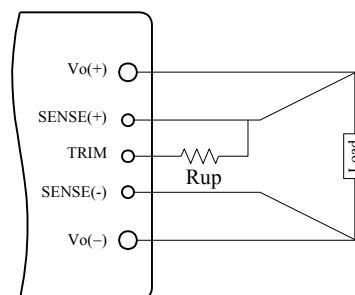


Fig. 5 Circuit to Increase Output Voltage

Input Under-Voltage Lockout

This feature prevents the converter from turning on until the input voltage reaches 17 V typical, and shuts down the converter if the input voltage falls below 16V typical. The 1V hysteresis prevents oscillations.

Output Over-Current Protection

As a standard feature, the converter will latch off when the load current exceeds the current limit. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will operate in a hiccup mode (repeatedly try to restart) until the over-current condition is cleared.

Output Over-Voltage Protection

If the voltage across the output pins exceeds the output voltage protection threshold as given in the Specifications table, the converter will shut down to protect the converter and the load.

As a standard feature, the converter will shut down and latch off when this fault occurs. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will operate in a hiccup mode until the over-voltage cause is cleared.

Thermal Shutdown

As a standard feature, the converter will shut down and latch off if an over-temperature condition is detected. The converter has a temperature sensor located at a

carefully selected position in the converter circuit board, which represents the thermal condition of key components of the converter.

The thermal shutdown circuit is designed to turn the converter off when the temperature at the sensor reaches 120°C. The module can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will resume operation after the converter cools down.

Design Considerations

Input Source Impedance

As with any DC/DC converter, the stability of the SA24 converters may be compromised if the source impedance is too high or inductive. It's desirable to keep the input source ac-impedance as low as possible. Although the converters are designed to be stable without an additional input capacitor for typical source impedance, it is recommended to use at least a 33 - 100 μ F low ESR electrolytic capacitor at the input of the converter to reduce the potential impact of the source impedance. This electrolytic capacitor should have sufficient RMS current rating over the operating temperature range.

Safety Considerations

The SA24 Series of converters are designed in accordance with EN 60950 Safety of Information Technology Equipment Including Electrical Equipment. The converters are recognized by UL in both USA and Canada to meet 1500V Basic Insulation requirements in UL 60950, Safety of Information Technology Equipment and applicable Canadian Safety Requirement, and ULc 60950. Flammability ratings of the PWB and plastic components in the converter meet 94V-0.

To protect the converter and the system, an input line fuse is highly recommended on the un-grounded input end.



A maximum rating of 5A normal-blow fuse should be connected at the un-grounded input lead of each SA24 converter.

Thermal Considerations

The SA24 Series of converters can operate in various thermal environments. Due to the high efficiency and optimal heat distribution, these converters exhibit excellent thermal performance. Proper cooling can be verified by monitoring the temperature of the case not continuously exceeding 120 °C.

The maximum allowable output power of any power converter is usually determined by the electrical design and the maximum operating temperature of its components.

Mechanical Diagrams

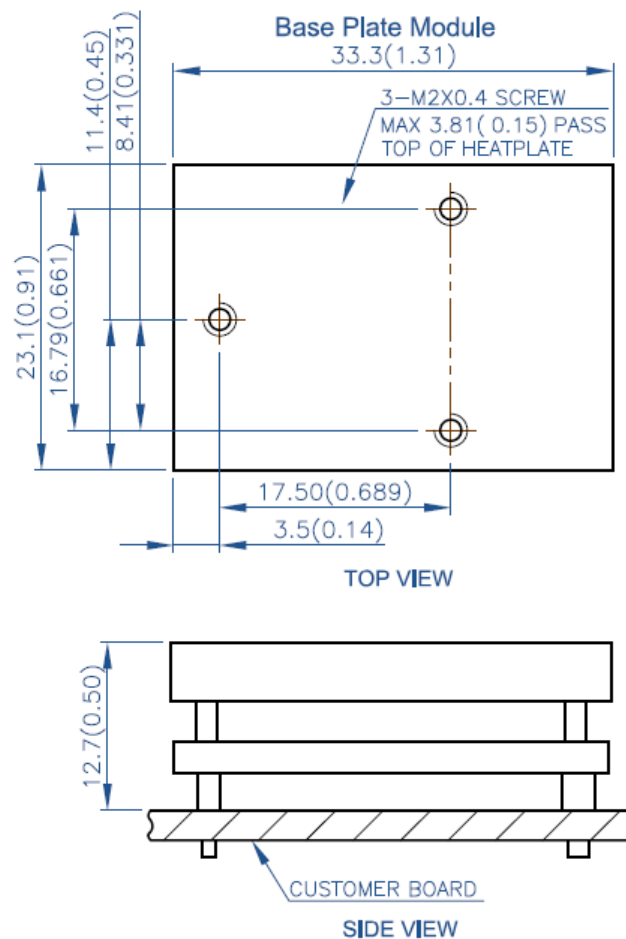
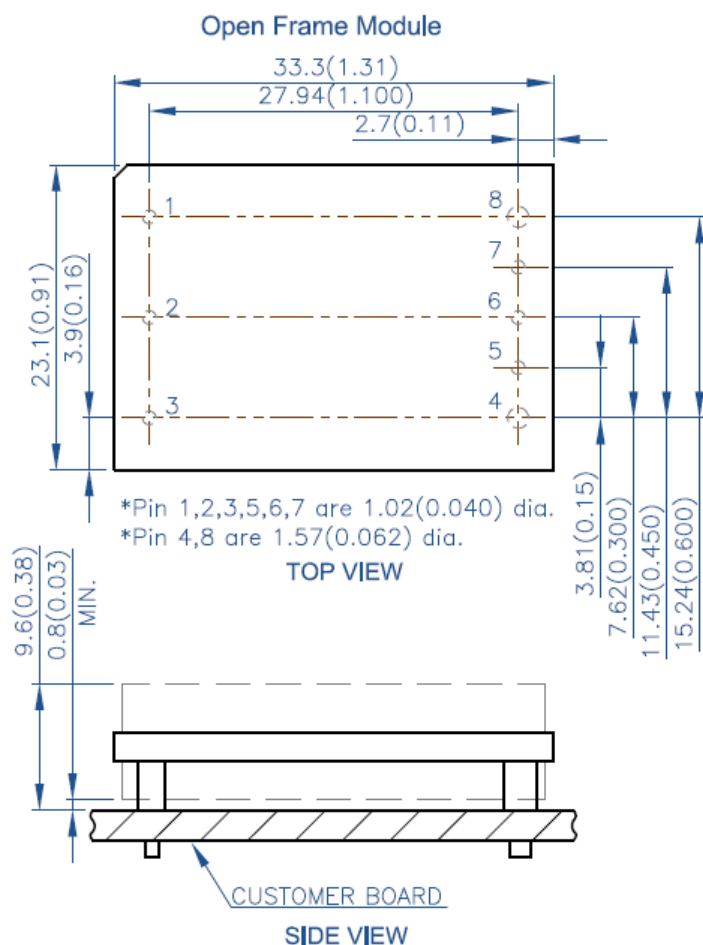


Pin	Name	Function
1	Vin(+)	Positive input voltage
2	ON/OFF	Remote control
3	Vin(-)	Negative input voltage
4	Vout(-)	Negative output voltage
5	SENSE(-)	Negative remote sense
6	TRIM	Output voltage adjust
7	SENSE(+)	Positive remote sense
8	Vout(+)	Positive output voltage

Notes:

All dimensions in mm (inches)
Tolerances: x ± .5 (.xx ± 0.02)
.xx ± .25 (.xxx ± 0.010)

Encapsulated Type-I
(without mounting holes)

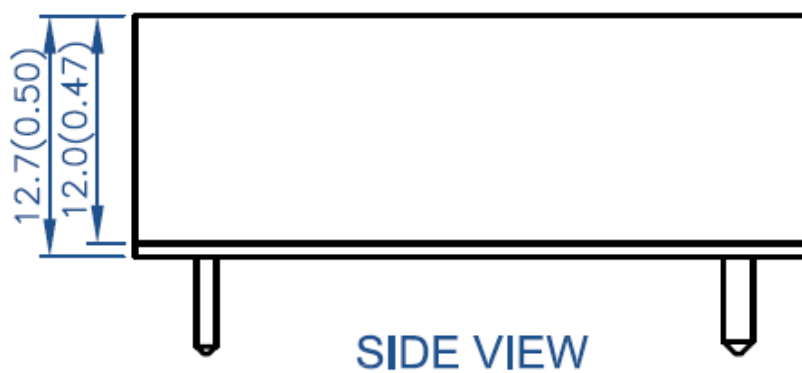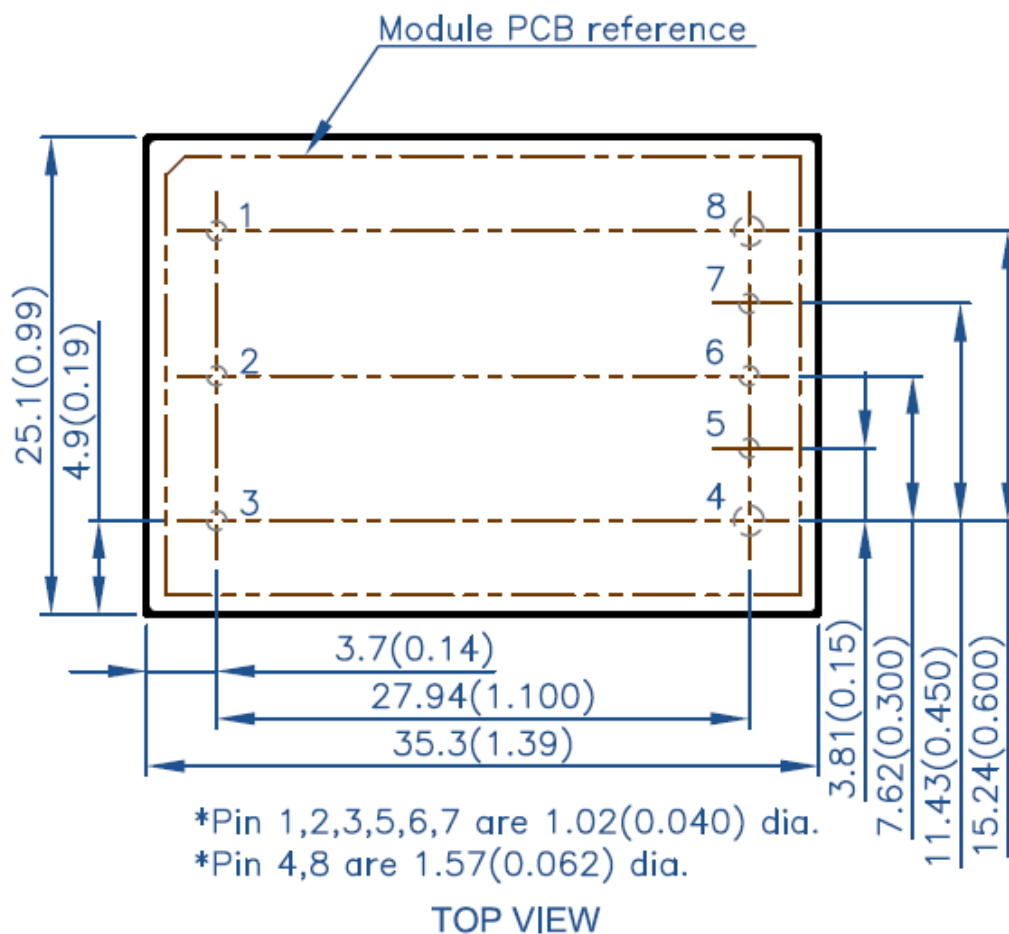

[illegible]

Diagram showing the side view of the part. Dimensions are indicated: 12.7(0.50) for the total height and 2.5(0.10) for the thickness of the base plate. The text "SIDE VIEW" is centered below the drawing.



SA24x080x008xxx

18-36V Input, 8V/8A Output DC/DC Converter

**For more information, please contact
Dr. Power's China Representative:**

上海军陶电源设备有限公司

电 话: 021-54958911; 021-54958922

传 真: 021-24205911

Warranty

Dr. Power offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request. Information furnished by Dr. Power is believed to be accurate and reliable. However, no responsibility is assumed by Dr. Power for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Dr. Power.