

## 9-36V Input, 8V/7A Output Sixteenth Brick



### Features

- Wide input voltage range: 9 – 36V
- High Efficiency: 91.0% at 8V/7A output
- Optimal thermal performance
- Remote sense, On/Off control,
- Over-voltage, over-current, short-circuit, and over temperature protection
- Monotonic start-up into pre-biased load
- 1500V isolation voltage

### Options

- Open-frame, Baseplate, or Encapsulated
- Auto-restart or lock-up protection mode
- Negative / Positive enable logic

***For High Reliability Applications***

### Part Numbering System

| SA          | 18                    | X                                              | 080                     | X                          | 007                  | X          | X                             | X                                                                          | X                         |
|-------------|-----------------------|------------------------------------------------|-------------------------|----------------------------|----------------------|------------|-------------------------------|----------------------------------------------------------------------------|---------------------------|
| Series Name | Nominal Input Voltage | Temperature Grade (Baseplate Temperature)      | Output Voltage          | Enabling Logic             | Rated Output Current | Pin Length | Electrical Option             | Mechanical Options                                                         | Lead-free, ROHS Compliant |
| SA          | 18: 9-36V             | C: -40C--80C<br>H: -40C--100C<br>M: -55C--100C | Unit: 0.1V<br>080: 8.0V | P: Positive<br>N: Negative | Unit: A<br>007: 7A   | R: 0.180"  | 0: Lock-up<br>2: Auto-restart | 0: Open-frame<br>1: Baseplate<br>2: Encapsulated<br>3: with mounting holes | G: Lead-free              |

## General Specification

### Absolute Maximum Rating

Excessive stresses over these absolute maximum ratings can cause permanent damage to the converter. Operation should be limited to the conditions outlined under the Electrical Specification Section.

| Parameter                                 | Symbol    | Min  | Max   | Unit |
|-------------------------------------------|-----------|------|-------|------|
| Input Voltage (continuous)                | $V_i$     | -0.5 | 40    | Vdc  |
| Input Voltage ( < 100ms, operating)       | $V_i$     | -    | 50    | Vdc  |
| Input Voltage (continuous, non-operating) | $V_i$     | -    | 50    | Vdc  |
| I/O Isolation Voltage                     |           | -    | 1,500 | Vdc  |
| Operating Ambient Temperature             | $T_o$     |      |       |      |
| “C” Temperature grade                     |           | -40  | 80    | °C   |
| “H” Temperature grade                     |           | -40  | 100   | °C   |
| “M” Temperature grade                     |           | -55  | 100   | °C   |
| Storage Temperature                       | $T_{stg}$ | -55  | 125   | °C   |

## Electrical Specifications

These specifications are valid over the converter's full range of input voltage, resistive load, and operating temperature unless noted otherwise.

### Input Specifications

| Parameter                                                                                  | Symbol          | Min | Typical | Max | Unit             |
|--------------------------------------------------------------------------------------------|-----------------|-----|---------|-----|------------------|
| Input Voltage                                                                              | $V_i$           | 9   | 18      | 36  | Vdc              |
| Input Current                                                                              | $I_{in\_Max}$   | -   | -       | 11  | A                |
| Quiescent Input Current (Typical $V_{in}$ )                                                | $I_{in\_Qsnt}$  | -   | 100     | 120 | mA               |
| Standby Input Current                                                                      | $I_{in\_Stdby}$ | -   | 6       | 18  | mA               |
| Inrush Transient                                                                           | $I^2_t$         | -   | -       | 1.0 | A <sup>2</sup> s |
| Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 12 $\mu$ H source impedance) | -               |     | 40      |     | mA               |
| Input Ripple Rejection                                                                     |                 |     | -       |     | dB               |
| Input Turn-on Voltage Threshold                                                            | -               | 8   | 8.5     | 9   | V                |
| Input Turn-off Voltage Threshold                                                           | -               | 7   | 7.5     | 8   | V                |
| Input Voltage ON/OFF Hysteresis                                                            | -               |     | 1       |     | V                |

### Output Specifications

| Parameter                                                                                           | Symbol | Min  | Typical | Max   | Unit    |
|-----------------------------------------------------------------------------------------------------|--------|------|---------|-------|---------|
| Output Voltage Set Point                                                                            | $V_o$  |      | 8       |       | Vdc     |
| Output Voltage Set Point Accuracy ( $V_i$ = Typical $V_{in}$ ; $I_o$ = $I_{o\_max}$ ; $T_a$ = 25°C) | -      | -2   |         | +2    | % $V_o$ |
| Output Voltage Set Point Accuracy (over all conditions)                                             | -      | -3   |         | +3    | % $V_o$ |
| Output Regulation:                                                                                  |        |      |         |       |         |
| Line Regulation (full range input voltage, 1/2 full load)                                           | -      | -    | 0.2     | 0.5   | % $V_o$ |
| Load Regulation (full range load, Typical $V_{in}$ )                                                | -      | -    | 0.2     | 0.5   | % $V_o$ |
| Temperature ( $T_a$ = -55°C to 100 °C)                                                              | -      | -    | 0.1     |       | % $V_o$ |
| Output Current                                                                                      | $I_o$  | 0    | -       | 7     | A       |
| Output Power                                                                                        | $P_o$  | 0    |         | 56    | W       |
| Efficiency (Typical $V_{in}$ ; $I_{o\_max}$ , $T_a$ = 25°C)                                         | $\eta$ | 89.0 | 91.0    | -     | %       |
| Output ripple frequency                                                                             | -      | 230  | 250     | 270   | kHz     |
| Output Ripple and Noise Voltage RMS                                                                 | -      | -    | -       | 75    | mVrms   |
| Peak-to-peak (5 Hz to 20 MHz bandwidth, Typical $V_{in}$ )                                          |        |      |         | 225   | mVp-p   |
| External Load Capacitance                                                                           | -      | -    | -       | 2,000 | $\mu$ F |

### Output Specifications (continued)

| Parameter                                                                                                                                                                                                                                                                                         | Symbol | Min | Typ                      | Max | Unit                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|--------------------------|-----|----------------------------|
| Startup Delay, duration from enabling signal to Vo reaches 10% of its set point.<br>(Typical Vin; Io_max, TA = 25°C)                                                                                                                                                                              |        |     | 7                        |     | ms                         |
| Startup Time, duration for Vo to rise from 10% of its set point to within its regulation band.<br>(Typical Vin; Io_max, TA = 25°C)                                                                                                                                                                |        |     | 10                       |     | ms                         |
| Output Over Current Protection Set Point / Io_max                                                                                                                                                                                                                                                 |        | 105 | 125                      | 165 | %                          |
| Output Over Voltage Protection Set Point / Vo_typical                                                                                                                                                                                                                                             |        | 115 | 125                      | 150 | %                          |
| Output Trim Range in % of Vo_typical                                                                                                                                                                                                                                                              |        | 80  | -                        | 110 | %                          |
| Output Remote Sense Range in % of Vo_typical                                                                                                                                                                                                                                                      |        |     |                          | 10  | %                          |
| Dynamic Response<br>(Vi = 18V; TA = 25°C; Load transient 0.1A/μs)<br>Load steps from 50% to 75% of full load:<br>Peak deviation<br>Settling time (within 10% band of Vo deviation)<br>Load step from 50% to 25% of full load<br>Peak deviation<br>Settling time (within 10% band of Vo deviation) |        |     | 4<br>250<br><br>4<br>250 |     | %Vo<br>μs<br><br>%Vo<br>μs |

### General Specifications

| Parameter                                                        | Symbol             | Min      | Typ    | Max        | Unit                  |
|------------------------------------------------------------------|--------------------|----------|--------|------------|-----------------------|
| Remote Enable<br>Logic Low:<br>ION/OFF = 1.0mA<br>VON/OFF = 0.0V | VON/OFF<br>ION/OFF | 0<br>-   | -<br>- | 1.2<br>1.0 | V<br>mA               |
| Logic High:<br>ION/OFF = 0.0μA<br>Leakage Current                | VON/OFF<br>ION/OFF | 3.5<br>- | -<br>- | 15<br>50   | V<br>μA               |
| Over-temperature Protection set point                            | To                 | -        | 120    | -          | °C                    |
| Isolation Capacitance                                            | -                  | -        | 1200   | -          | pF                    |
| Isolation Resistance                                             | -                  | 10       | -      | -          | MΩ                    |
| Calculated MTBF Telecordia SR-332, full load, 40°C, Typ. Vin     |                    |          | 3.8    |            | 10 <sup>6</sup> -hour |
| Calculated MTBF Telecordia SR-332, 50% load, 25°C, Typ. Vin      |                    |          | 6.3    |            | 10 <sup>6</sup> -hour |

## Feature Descriptions

The converter can be turned on and off by changing the voltage between the ON/OFF pin and Vin(-). The SA Series of converters is available with factory selectable positive logic and negative logic.

For the negative control logic, the converter is ON when the ON/OFF pin is at a logic low level and OFF when the ON/OFF pin is at a logic high level. For the positive control logic, the converter is ON when the ON/OFF pin is at a logic high level and OFF when the ON/OFF pin is at a logic low level.

With the internal pull-up circuitry, a simple external switch between the ON/OFF pin and Vin(-) can control the converter. A few example circuits for controlling the ON/OFF pin are shown in Fig. 1, 2 and 3.

The logic low level is from 0V to 1.2V and the maximum switch current during logic low is 1mA. The external switch must be capable of maintaining a logic-low level while sinking up to this current. The maximum voltage at the ON/OFF pin generated by the converter internal circuitry is less than 15V. The maximum allowable leakage current is 50μA.


### Remote SENSE

The remote SENSE pins are used to sense the voltage at the load point to accurately regulate the load voltage and eliminate the impact of the voltage drop in the power distribution path.


SENSE(+) and SENSE(-) pins should be connected to the point where regulation is desired. The voltage between the SENSE pins and the output pins must not exceed 0.5V:

$$[V_{out}(+) - V_{out}(-)] - [SENSE(+) - SENSE(-)] < \min\{0.5V, 10\%V_o\}$$


When remote sense is not used, the SENSE pins should be connected to their corresponding output terminals (positive and negative). If the SENSE pins are left floating, the converter will deliver an output voltage slightly higher than its specified typical output voltage. Since the OVP (output over-voltage protection) circuit senses the voltage across the output pins (Pin 8 and Pin 4), the total voltage rise should not exceed the minimum OVP setpoint given in the Specifications table.



**Fig. 1** Opto Coupler Enable Circuit

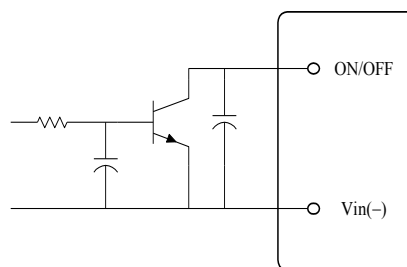

**Fig. 2** Open Collector Enable Circuit

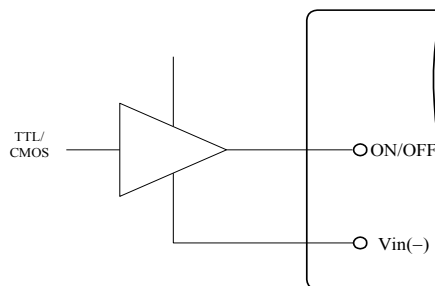

**Fig. 3** Direct Logic Drive

### Output Voltage Adjustment (Trim)

The trim pin allows the user to adjust the output voltage set point. To increase the output voltage, an external resistor is connected between the TRIM pin and SENSE(+). To decrease the output voltage, an external resistor is connected between the TRIM pin and

SENSE(-). The output voltage trim range is 80% to 110% of its specified nominal output voltage. The circuit configuration for trim down operation is shown in Fig.4.

$$R_{down} = \left( \frac{511}{\Delta} - 10.22 \right) (k\Omega)$$

Where

$$\Delta = \left( \frac{|V_{nom} - V_{adj}|}{V_{nom}} \right) \times 100$$

and

$V_{nom}$  = Nominal Voltage

$V_{adj}$  = Adjusted Voltage

The circuit configuration for trim up operation is shown in Fig.5.


To increase the output voltage, the value of the resistor should be

$$R_{up} = \left( \frac{5.11V_o(100 + \Delta)}{1.225\Delta} - \frac{511}{\Delta} - 10.22 \right) (k\Omega)$$


Where  $V_o$  = Nominal Output Voltage

This equation applies to typical output voltage of 1.5V or higher.

As the output voltage at the converter output terminals are higher than the specified nominal level when using the trim up and/or remote sense functions, it is important not to exceed the maximum power rating of the converter as given in the Specifications table.

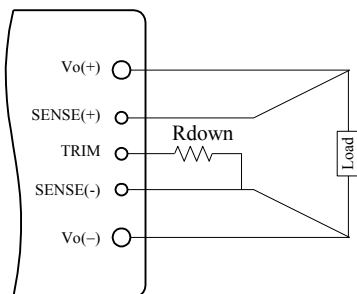

**Fig. 4** Circuit to Decrease Output Voltage

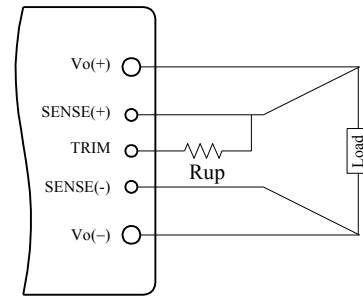

**Fig. 5** Circuit to Increase Output Voltage

### Input Under-Voltage Lockout

This feature prevents the converter from starting until the input voltage reaches the turn-on voltage threshold, and keeps the converter running until the input voltage falls below the turn-off voltage threshold. Both turn-on and turn-off voltage thresholds are defined in the Input Specifications table. The hysteresis prevents oscillations.

### Output Over-Current Protection

As a standard feature, the converter will latch off when the load current exceeds the current limit. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will operate in a hiccup mode (repeatedly try to restart) until the over-current condition is cleared.

### Output Over-Voltage Protection

If the voltage across the output pins exceeds the output voltage protection threshold as given in the Specifications table, the converter will shut down to protect the converter and the load.

As a standard feature, the converter will shut down and latch off when this fault occurs. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will operate in a hiccup mode until the over-voltage cause is cleared.

### Thermal Shutdown

As a standard feature, the converter will shut down and latch off if an over-temperature condition is detected.

The converter has a temperature sensor located at a carefully selected position in the converter circuit board, which represents the thermal condition of key components of the converter.

The thermal shutdown circuit is designed to turn the converter off when the temperature at the sensor reaches 120°C. The module can be restarted by toggling the ON/OFF switch or recycling the input voltage. With the auto-restart option, the converter will resume operation after the converter cools down.

## Design Considerations

### Input Source Impedance

As with any DC/DC converter, the stability of the SA converters may be compromised if the source impedance is too high or inductive. It's desirable to keep the input source ac-impedance as low as possible. Although the converters are designed to be stable without an additional input capacitor for typical source impedance, it is recommended to use at least a 33 - 100  $\mu$ F low ESR electrolytic capacitor at the input of the converter to reduce the potential impact of the source impedance. This electrolytic capacitor should have sufficient RMS current rating over the operating temperature range.

## Safety Considerations

The SA Series of converters are designed in accordance with EN 60950 Safety of Information Technology Equipment Including Electrical Equipment. The converters are recognized by UL in both USA and Canada to meet 1500V Basic Insulation requirements in UL 60950, Safety of Information Technology Equipment and applicable Canadian Safety Requirement, and ULc 60950. Flammability ratings of the PWB and plastic components in the converter meet 94V-0.

To protect the converter and the system, an input line fuse is highly recommended on the un-grounded input end.


A maximum rating of 5A normal-blow fuse should be connected at the un-grounded input lead of each SA converter.

## Thermal Considerations

The SA Series of converters can operate in various thermal environments. Due to the high efficiency and optimal heat distribution, these converters exhibit excellent thermal performance. Proper cooling can be verified by monitoring the temperature of the case not continuously exceeding 120 °C.

The maximum allowable output power of any power converter is usually determined by the electrical design and the maximum operating temperature of its components.

## Mechanical Diagrams

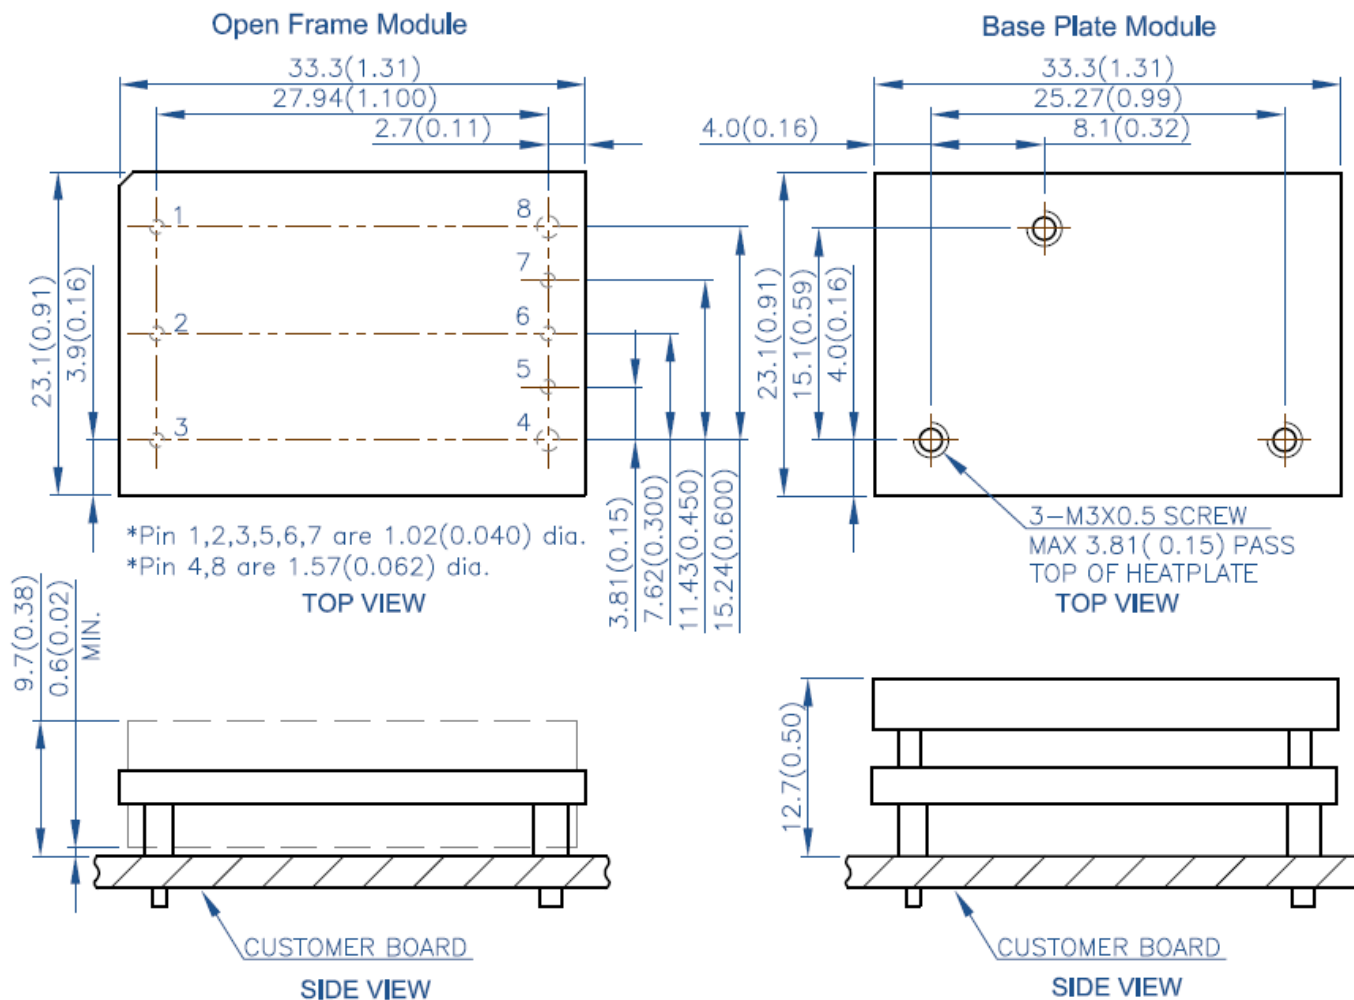


| Pin | Name     | Function                |
|-----|----------|-------------------------|
| 1   | Vin(+)   | Positive input voltage  |
| 2   | ON/OFF   | Remote control          |
| 3   | Vin(-)   | Negative input voltage  |
| 4   | Vout(-)  | Negative output voltage |
| 5   | SENSE(-) | Negative remote sense   |
| 6   | TRIM     | Output voltage adjust   |
| 7   | SENSE(+) | Positive remote sense   |
| 8   | Vout(+)  | Positive output voltage |


### Notes:

All dimensions in mm (inches)  
 Tolerances:  $x \pm .5$  ( $.xx \pm 0.02$ )  
 $.xx \pm .25$  ( $.xxx \pm 0.010$ )

**Encapsulated Type-I  
(without mounting holes)**

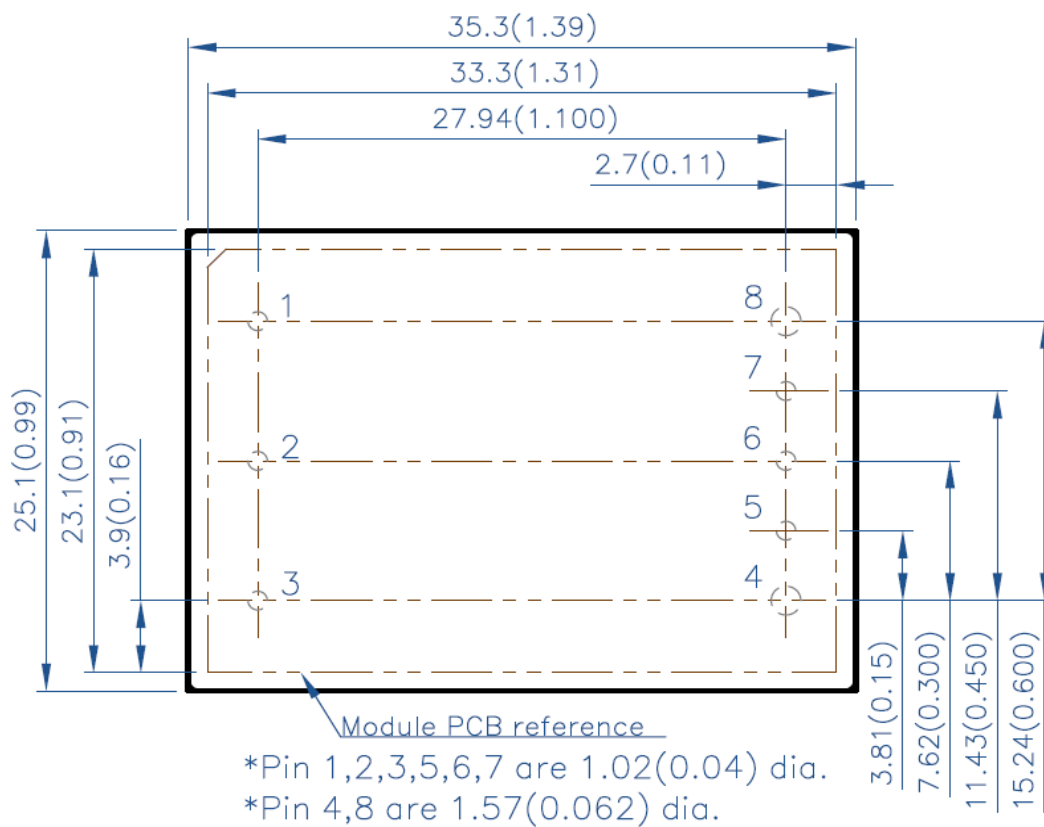

**TOP VIEW**

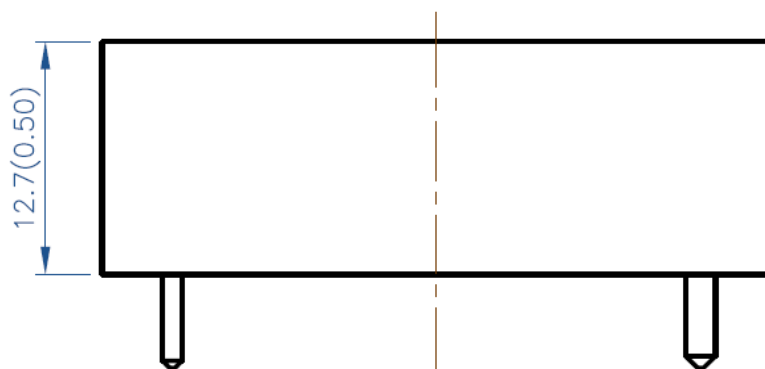

**SIDE VIEW**

37.5(1.48)  
33.7(1.33)  
1.9(0.08)REF  
27.1(1.07)  
23.1(0.91)  
3.9(0.16)  
R2(0.08)  
3.2(0.13)  
7.4(0.29)REF  
5.5(0.22)  
1.4(0.05)REF  
2.7(0.11)  
3.81(0.150)  
7.62(0.300)  
11.43(0.450)  
15.24(0.600)  
11.1(0.44)  
5.2(0.20)REF  
24.2(0.95)  
27.94(1.100)  
33.3(1.31)  
36.3(1.43)  
39.0(1.54)  
C3.0  
(0.12)  
Module PCB reference  
1  
2  
3  
4  
5  
6  
7  
8  
\*Pin 1,2,3,5,6,7 are 1.02(0.04) dia.  
\*Pin 4,8 are 1.57(0.062) dia.



## SA18x080x007xxx

### 9-36V Input,8V/7A Output DC/DC Converter

**For more information, please contact  
Dr. Power's China Representative:**

上海军陶电源设备有限公司

电 话: 021-54958911; 021-54958922

传 真: 021-24205911

#### Warranty

Dr. Power offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request. Information furnished by Dr. Power is believed to be accurate and reliable. However, no responsibility is assumed by Dr. Power for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Dr. Power.